

## PTZ Camera Remote Controller

EKB-01





### Features

- 4D joystick, comfortable operation;
- Support to control up to 8 cameras;
- RS232, RS422 & USB control interfaces;
- Support VISCA protocol;
- Knobs to adjust control speed, brightness & focus.

### Technical Data

Model	EKB-01
Comm. Interface	RS232, RS422 & USB
Protocol	VISCA
Baud Rate	9600bps
Video Input	4 Channels
Joystick	4D joystick with adjustable speed
Button	Tri-color mechanical buttons
Power	DC12V(±10%) / USB
Power Consumption	<2W
Working Temperature	0°C ~ 40°C
Storage Temperature	-20°C ~ +40°C
Humidity	≤90% (no condensation)
Dimension	373mm(L) * 149mm(W) * 43mm(H)
Net Weight	1.6kg

### Dimensions

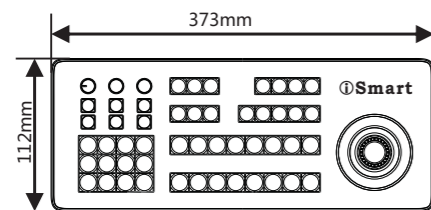

## Mini Keyboard Controller

CKB-02



### Features

- 4D joystick for pan/tilt/zoom/focus control, ergonomic design and excellent finishing;
- High brightness OLED display;
- Auto backlight keys;
- Shortcut keys customization;
- Sleep functions;
- Batch program cameras in the systems;
- Support Pelco D/P, VISCA protocols;
- Multi-level protection from unauthorized operation or setting;
- 256 address;
- Compact design with portable features.

### Technical Data

Model	CKB-02
Comm. Interface	RS-485, RS-232
Protocol	Pelco-D, Pelco-P, VISCA
Baud Rate	2400bps, 4800bps, 9600bps, 19200bps, 38400bps
Address	0~255
Joystick	4-axis (Left/Right, Up/Down, Zoom In/Zoom Out, Focus Near / Focus Far)
Display	OLED
Power	DC12V
Power Consumption	<2W
Working Temperature	0°C~40°C
Storage Temperature	-20°C~+50°C
Humidity	≤90% (no condensation)
Dimension	200mm(L)*120mm(W)*103mm(H)
Net Weight	0.5kg

### Dimensions

