


LAVALIER GO™

PROFESSIONAL WEARABLE MICROPHONE




BROADCAST
QUALITY



TRS
CONNECTION



WIRELESS GO
COMPATIBLE

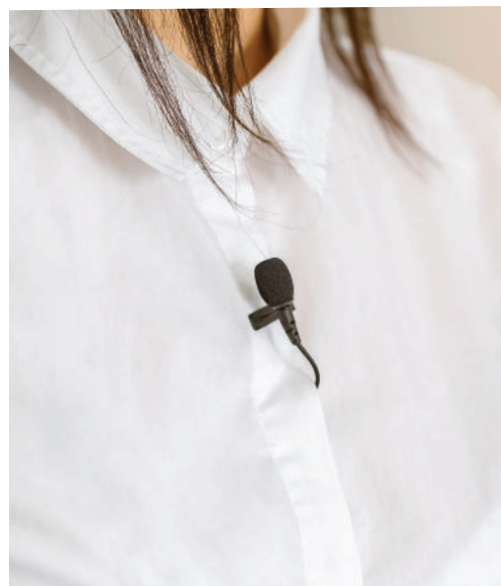

ACOUSTICS & ELECTRICAL SPECIFICATIONS

Acoustic Principle:	Permanently Polarised Condenser
Polar Pattern	Omni-directional
Frequency Range	20Hz - 20kHz
Output Impedance	3k Ω Typical
Signal To Noise Ratio	67 dB
Equivalent Noise	27 dB Typical
Maximum SPL	110 dB
Sensitivity	-35dB (17.8mV @94dB SPL)
Dynamic Range	83dB Typical
Power Requirements	Powered from plug-in power TRS socket (2.7V)
Output Connection	Gold-plated TRS plug

MIC Front view



TRS Front view



POLAR PATTERN

